

REPLACING THE HANDSET ON A VOICECOM PHONE

Summary	
News Type	Engineering Note
Purpose	To explain the process of replacing a damaged handset on a VoiceCom Phone.
Product Range	VoiceCom Phones
Target Audience	Electrical Engineering Managers of sites with VoiceCom Phone systems
Date of Issue	6 th August 2015

OVERVIEW

The VoiceCom Phone has been specifically designed to allow in-field replacement of damaged handsets. This advantage of this design is that, unlike the IS2000 Telephone, VoiceCom Phones with damaged handsets will not be required to be returned to Ampcontrol for repair.

This engineering note provides instruction for removing the damaged handset and replacing it with a new handset.

RELEVANT PART NUMBERS

Part Number	Description
169890	VoiceCom Phone c/w Standard Handset
169893	VoiceCom Phone c/w Push-to-Talk Handset
170364	Replacement Handset for VoiceCom Phone
170365	Replacement Push-to-Talk Handset for VoiceCom Phone

REMOVING THE DAMAGED HANDSET

To remove the damaged handset, unscrew the handset connector as indicated in the below image:




INSTALLING THE NEW HANDSET

The VoiceCom Phone has been designed with interchangeable standard and push-to-talk handsets. This allows **either a standard handset or a push-to-talk handset** to be installed on any VoiceCom Phone.

To install the new handset:

1. Insert the plug of the new handset into the 4-pin socket on the bottom of the VoiceCom Phone, taking care to align the locating notch on the plug to the locating pin on the socket.
2. Secure the handset in the socket by screwing the thread on the plug into the socket.

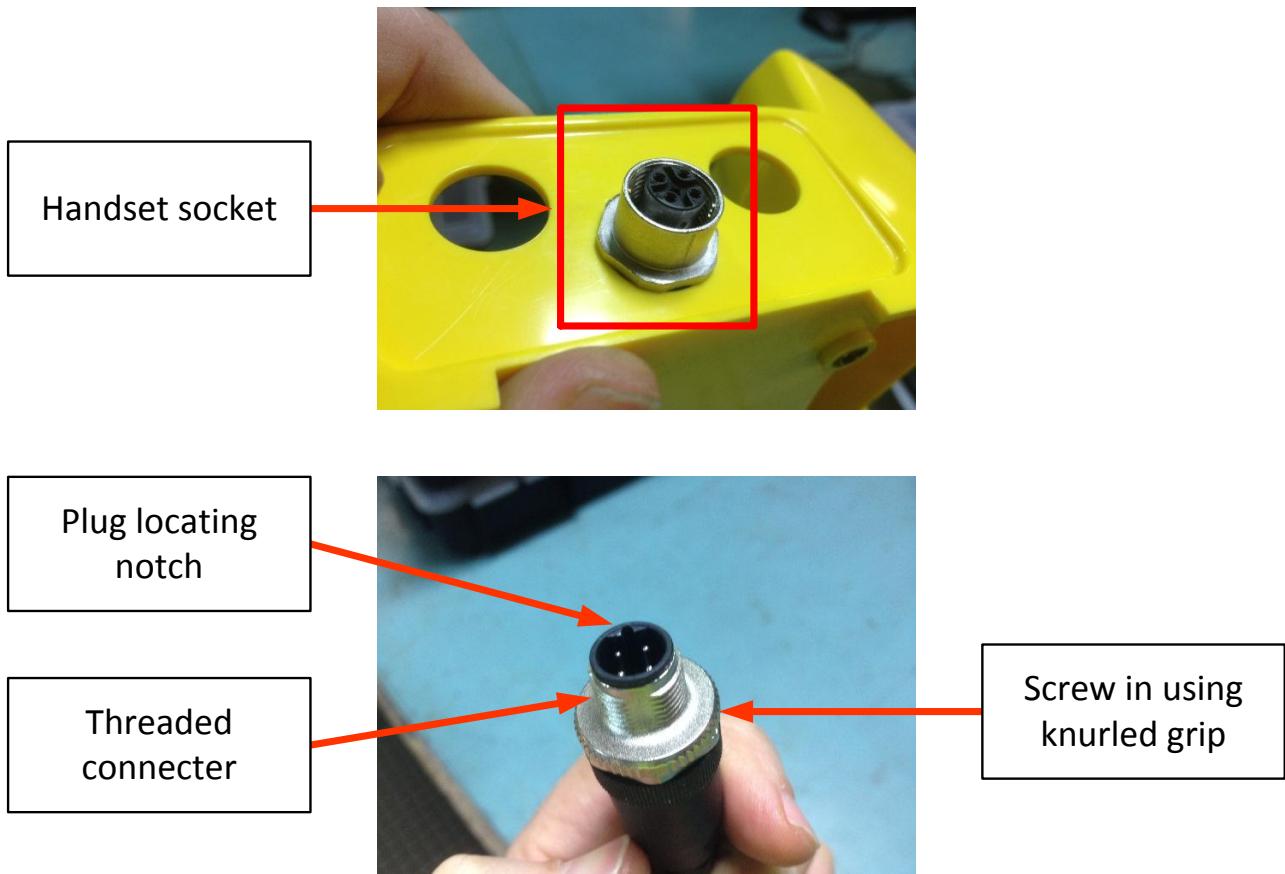

FIND OUT MORE

For more information on this product, contact Amcontrol Customer Service on +61 1300 267 373 or customerservice@ampcontrolgroup.com or visit the Amcontrol website: www.ampcontrolgroup.com

DISCLAIMER

While every effort has been made to assure the accuracy of this document at the date of issue, Amcontrol assumes no liability resulting from any omissions or errors in this document, and reserves the right to revise content at any time.